

Warm
Walls

Dry
Rooms

eDRYER[®]

easy electronic dehumidification

- Stops rising (capillary) damp in masonry
- Active dehumidification by process-controlled ventilation
- Progress monitoring of wall drying directly on the device
- Documentation of all values up to 10 years
- Easy installation
Low costs
Many references




www.edryer.com



- Type/version
- Counter
days of operation
- Rel. humidity %RH
- Temperature °C
- Temperature dew point °C
- Humidity of wall units
- FAN (24h)



State-of-the-art software (English/German) for individual configuration of the eDryer system

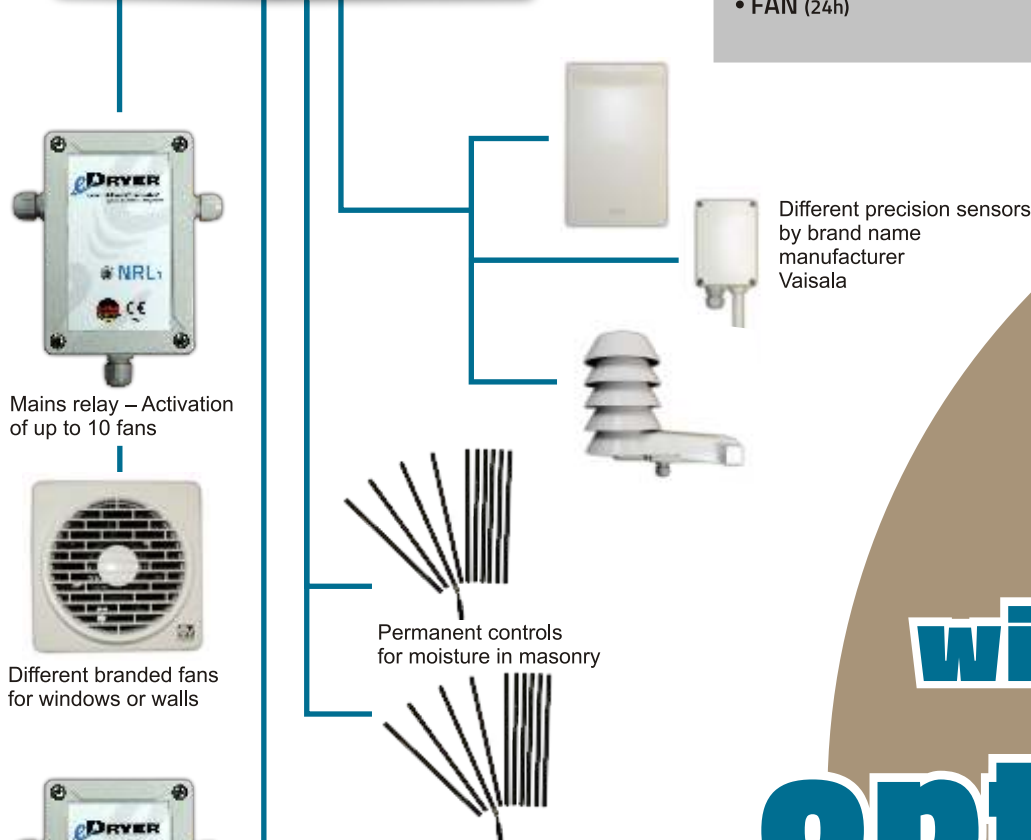

Mains relay – Activation of up to 10 fans



Different branded fans for windows or walls



One device with many options ... also for you!

Main functions

1. **Electro-osmosis**
Stops the rising capillary moisture
2. **Process-controlled, active dehumidification,**
e.g. dew point control
Connection of up to 2 mains relay with max. 10 fans each
3. **Data logger function**
Data logging of all connected devices over a period of up to 10 years

Landsberger Straße 58, D-04736 Waldheim
Phone.: +49 (0) 3 43 27- 62 91 -10, Fax: -11
eMail: info@schreiter-kroll.de

www.schreiter-kroll.de



SCHREITER & KROLL

Natural construction materials & masonry dehumidification